



PERMIT TO CONSTRUCT Onsite Wastewater System

File Nbr: **2021060028**
County: Orangeburg

Name: TYLER SGRO

Program Code: 362

Type Facility: MOBILE HOME

Address: 4524 ORR ST
NORTH CHARLESTON, SC 29405

System Code: 270

Subdivision: SPRING MEADOW

Site: MELLOWTIME CT

TM No.: 178-00-04-051

Block: Lot: 10

ST. MATTHEWS, SC 29135

Water Supply: PRIVATE

PERMIT TO CONSTRUCT SYSTEM SPECIFICATIONS

Daily Flow (gpd): 480

Tank Sizes (gal): Septic Tank: 1000

Pump Chamber:

Grease Trap:

LTAR: .50

Trenches: Length (ft): 173 Width (in): 120 Max. Depth (in): 19

Agg. Depth (in): 6

Min Pump Capacity:

gpm at

ft. of head Alternative Product:

SPECIAL INSTRUCTIONS/CONDITIONS

THIS PERMIT IS SITE SPECIFIC. ANY CHANGES TO THE SYSTEM MUST BE APPROVED BY DHEC. ALTERNATIVE TRENCH PRODUCTS APPROVED UNDER STATE RULES AND REGULATIONS MAY BE SUBSTITUTED. ANY UNAPPROVED CHANGES WILL VOID THIS PERMIT.

Installers must contact the local Environmental Affairs office by 10:00 AM on the day prior to installation in order to schedule a time for the final inspection.


If a Department representative does not arrive within 30 minutes of the scheduled time, the installer may conduct the final inspection.

When a contractor self-inspection occurs, the installer must complete the DHEC form 3978, Approval to Operate Contractor Self-Inspection.

The installer must submit DHEC form 3978 within 2 business days of the completion of the installation.

PERMIT TO CONSTRUCT SYSTEM DIAGRAM

(NTS)

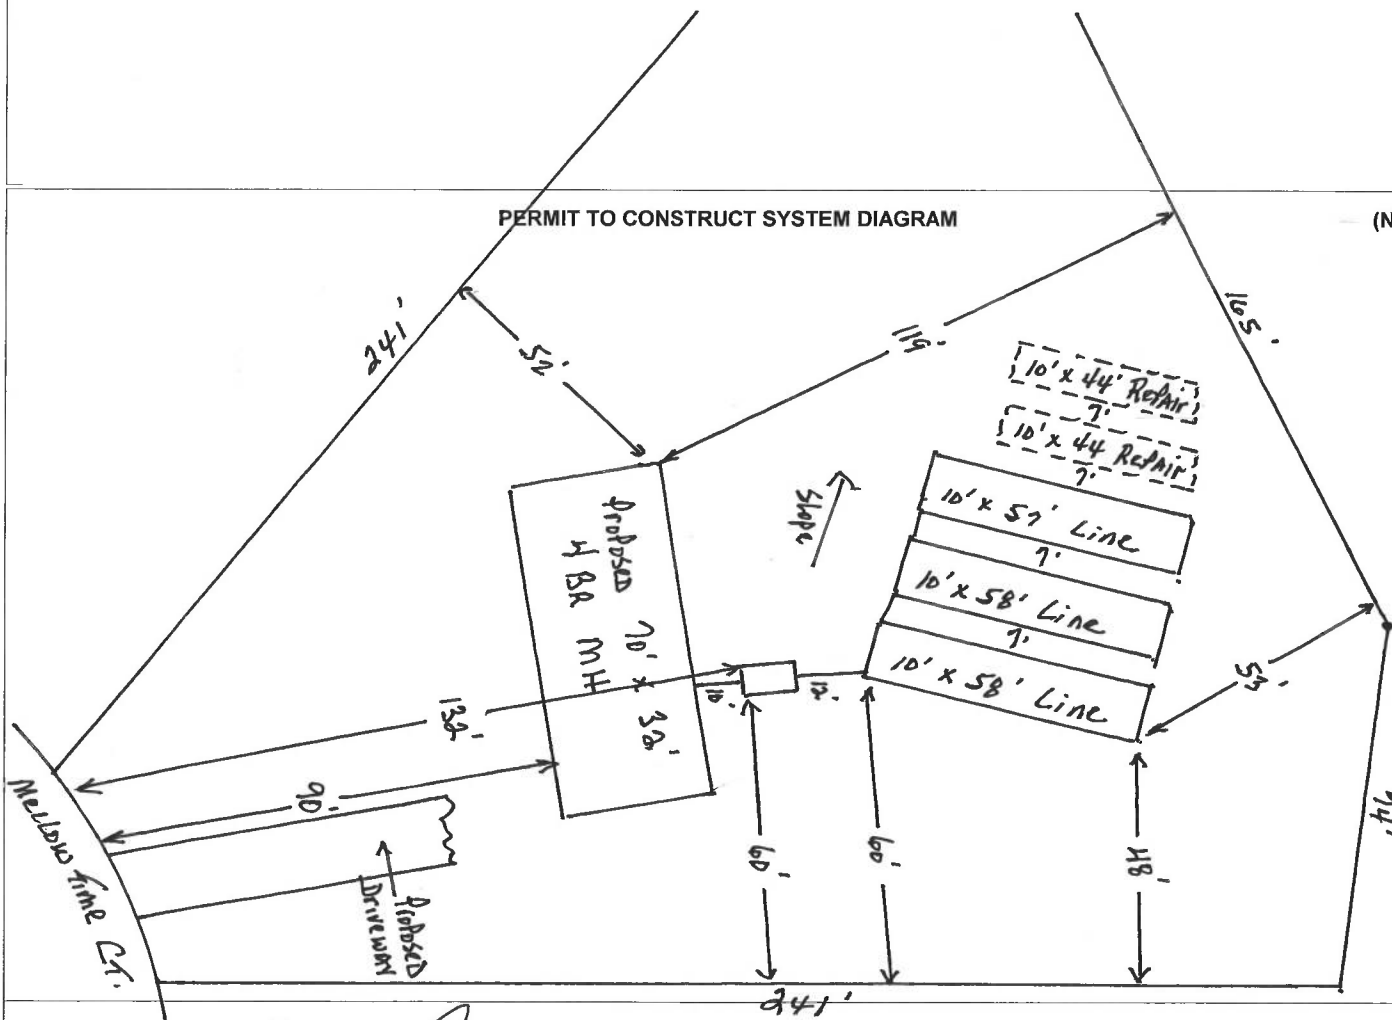

Issued/Revised By:

Jeff [Signature]

Date:

7-02-2021

Per. Tyler Sgro, LPSC #119 SC

This Permit is Appealable Under the Administrative Procedures Act.

This permit will expire and become null and void five (5) years from the issuance date.

There may be an Additional Fee for Changes in this Permit that Require a Site Reevaluation.

DHEC 1781 (02/2020)



7-7-2021

Personal information provided on this form is subject to public scrutiny or release.