



**PERMIT TO CONSTRUCT
Onsite Wastewater System**

File Nbr **2021080025**
County: Colleton

Name: MR GREG PHILLIPS
Type Facility: MOBILE HOME
Subdivision:
Block: Lot:

c/o TYLER SGRO
Address: 4524 ORR ST
N. CHARLESTON, SC 29405
Site: 891 KEEGAN DR
WALTERBORO, SC 29488

Program Code: 360
System Code: 100
TM No.: 115-00-00-299.000
Water Supply: PRIVATE

PERMIT TO CONSTRUCT SYSTEM SPECIFICATIONS

Daily Flow (gpd): 480
LTAR: .90
Min Pump Capacity:

Tank Sizes (gal): Septic Tank: 1000 Pump Chamber: Grease Trap:
Trenches: Length (ft): 180 Width (in): 36 Max. Depth (in): 32 Agg. Depth (in): 14
gpm at ft. of head Alternative Product:

SPECIAL INSTRUCTIONS/CONDITIONS

THIS PERMIT IS SITE SPECIFIC. ANY CHANGES TO THE SYSTEM MUST BE APPROVED BY DHEC. ALTERNATIVE TRENCH PRODUCTS APPROVED UNDER STATE RULES AND REGULATIONS MAY BE SUBSTITUTED. ANY UNAPPROVED CHANGES WILL VOID THIS PERMIT.

Installers must contact the local Environmental Affairs office by 10:00 AM on the day prior to installation in order to schedule a time for the final inspection.

If a Department representative does not arrive within 30 minutes of the scheduled time, the installer may conduct the final inspection:

When a contractor self-inspection occurs, the installer must complete the DHEC form 3978, Approval to Operate Contractor Self-Inspection.

The installer must submit DHEC form 3978 within 2 business days of the completion of the installation.

All applicable setbacks set forth in Regulation 61-56 apply.

Do not cut, fill, bulldoze, scrape or change the grade of the natural soils in the septic system area.

Do not install under wet soil conditions. Minimum 9" cover over system after installation.

No parking, driving, building or paving over the area of septic system before or after installation.

Minimum 75' from private well; 100' from public well; 25' from drainage ditches.

Preconstruction conference required for property owners who wish to install their own system.

PERMIT TO CONSTRUCT SYSTEM DIAGRAM

(NTS)

**SEE ATTACHED SUPPLEMENTAL FORM
FOR
ONSITE WASTEWATER SYSTEM DESIGN**

**This Permit to Construct is issued based on
a soil report submitted by Professional Soil Classifier,
Tyler Sgro, S.C. License Number 119,
dated August 27, 2021.**

Issued/Revised By: _____

Date: _____

DHEC 1781 (02/2020)

This Permit is Appealable Under the Administrative Procedures Act.

This permit will expire and become null and void five (5) years from the issuance date.

There may be an Additional Fee for Changes in this Permit that Require a Site Reevaluation.

Personal information provided on this form is subject to public scrutiny or release.



APPLICATION SUPPLEMENTAL FORM

Onsite Wastewater System

File Nbr: **2021080025**

County: Colleton

Name: MR GREG PHILLIPS

Address: c/o TYLER SGRO
4524 ORR ST
N. CHARLESTON, SC 29405

Program Code: 360

Type Facility: MOBILE HOME

System Code:

Subdivision

Site: 891 KEEGAN DR
WALTERBORO, SC 29488


TM No.: 115-00-00-299.000

Block: Lot:

Water Supply: PRIVATE

Phillips - 891 Keegan Drive

(NTS)

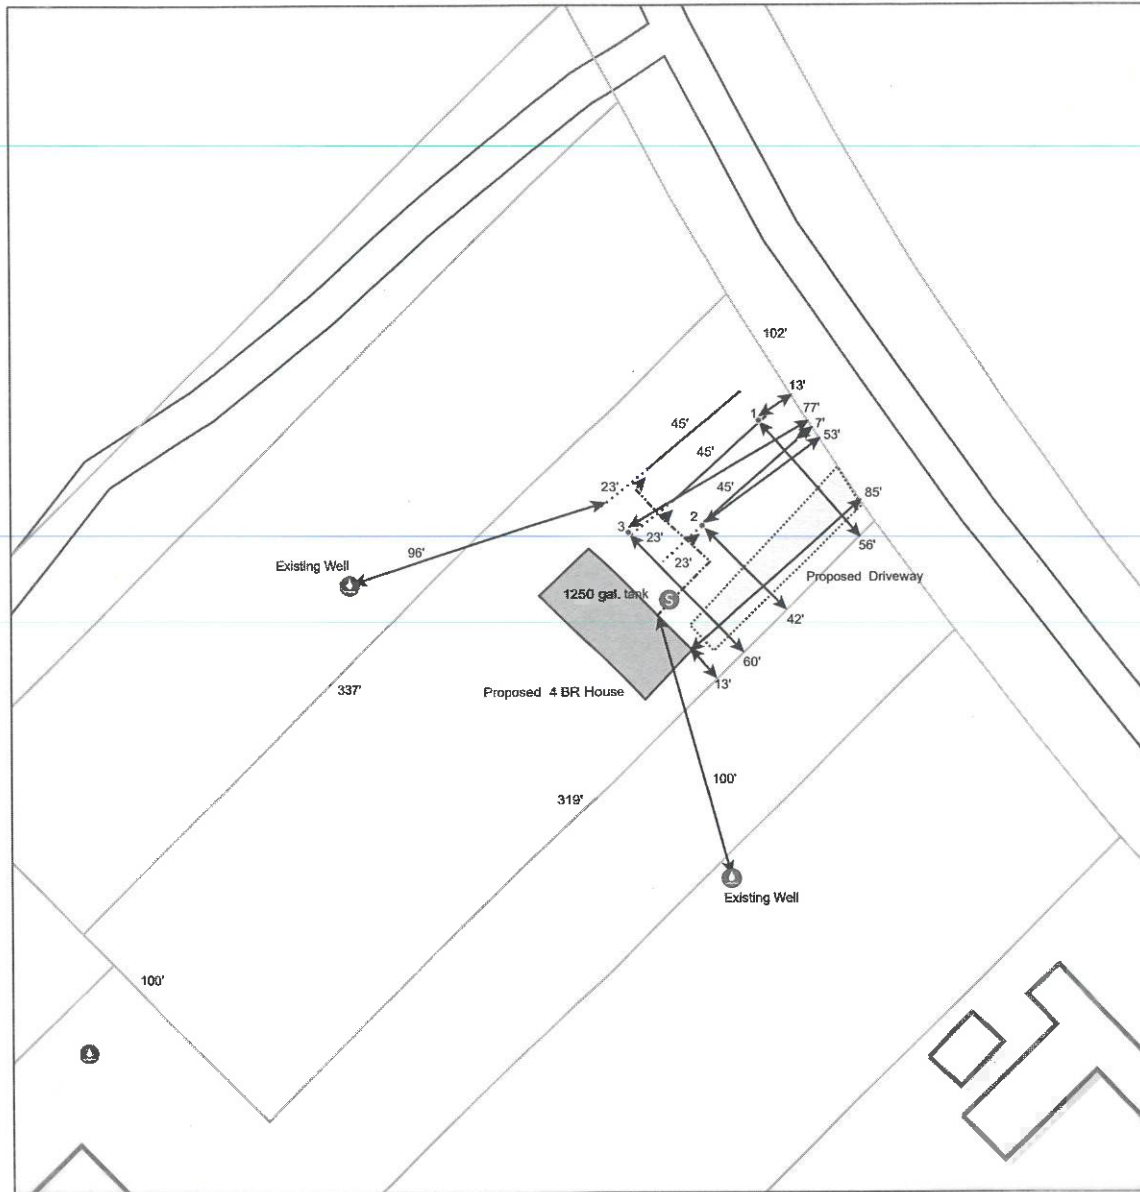

8/27/2021, 6:20:32 PM

ONSITE WASTEWATER SYSTEM DESIGN

1:564



- Soil Data Form
- Septic_Design_8153
- Ⓐ Well
- Ⓢ Septic Tank
- Septic_Design_804
- ↔ Distance/Setback
- Drain Lines
- Repair Lines
- > Distribution Line
- Septic_Design_9782
- House
- Driveway
- Public_Data_6454

is issued based on
 a soil report submitted by Professional Soil Classifier,
 Tyler Sgro, S.C. License Number 119,
 dated August 27, 2021.

James Brown 8/2/2021