

PERMIT TO CONSTRUCT

Onsite Wastewater System

File Nbr:2021060027

County: Orangeburg

Name: TYLER SGRO

Type Facility: MOBILE HOME

Address: 4524 ORR ST

NORTH CHARLESTON, SC 29405

System Code: 271

Program Code: 362

Subdivision: SPRING MEADOW

Site: MORNINGSIDE DR

TM No.: 178-00-04-058

Block:

Lot: 35

ST. MATTHEWS, SC 29135

Water Supply: PRIVATE

PERMIT TO CONSTRUCT SYSTEM SPECIFICATIONS

Daily Flow (gpd): 360

Tank Sizes (gal): Septic Tank: 1000

Pump Chamber: 500

Grease Trap:

LTAR: .50

Trenches: Length (ft): 130

Width (in): 120

Max. Depth (in): 16

Agg. Depth (in): 6

Min Pump Capacity: 10

gpm at 10

ft. of head Alternative Product:

SPECIAL INSTRUCTIONS/CONDITIONS

THIS PERMIT IS SITE SPECIFIC. ANY CHANGES TO THE SYSTEM MUST BE APPROVED BY DHEC, ALTERNATIVE TRENCH PRODUCTS APPROVED UNDER STATE RULES AND REGULATIONS MAY BE SUBSTITUTED. ANY UNAPPROVED CHANGES WILL VOID THIS PERMIT.


Installers must contact the local Environmental Affairs office by 10:00 AM on the day prior to installation in order to schedule a time for the final inspection. If a Department representative does not arrive within 30 minutes of the scheduled time, the installer may conduct the final inspection. When a contractor self-inspection occurs, the installer must complete the DHEC form 3978, Approval to Operate Contractor Self-Inspection.

The installer must submit DHEC form 3978 within 2 business days of the completion of the installation.

MAXIMUM DEPTH @ 16 INCHES AT START OF LINES. MAXIMUM DEPTH @ END OF LINES 22 INCHES.

PERMIT TO CONSTRUCT SYSTEM DIAGRAM

(NTS)

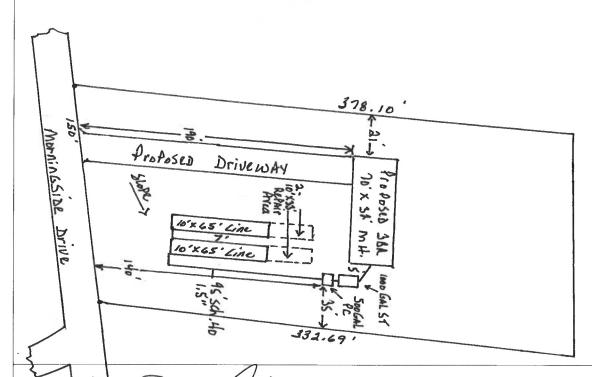

Issued/Revised By:

Per. Tyler agro

Date:

7-2-2021

DHEC 1781 (02/2020)

This Permit is Appealable Under the Administrative Procedures Act.

This permit will expire and become null and void five (5) years from the issuance date.

There may be an Additional Fee for Changes in this Permit that Require a Site Reevaluation.

7-7-8001

Personal information provided on this form is subject to public scutiny or release.