



PERMIT TO CONSTRUCT
Onsite Wastewater System

File Nbr: 2022080008
County: Berkeley

Name: TYLER SGRO

Type Facility: MOBILE HOME

Subdivision:

Block: Lot: 1

Address: 4524 ORR ST
NORTH CHARLESTON, SC 29405

Site: FRENCH SANTEE RD LOT 1
JAMESTOWN, SC

Program Code: 362

System Code: 290

TM No.: 110-00-02-047

Water Supply: PRIVATE

PERMIT TO CONSTRUCT SYSTEM SPECIFICATIONS

Daily Flow (gpd): 480

LTAR: .60

Min Pump Capacity:

Tank Sizes (gal): Septic Tank: 1000 Pump Chamber:

Trenches: Length (ft): 144 Width (in): 120 Max. Depth (in): 12

gpm at ft. of Head Alternative Product:

Grease Trap:

Agg. Depth (in): 6

SPECIAL INSTRUCTIONS/CONDITIONS

THIS PERMIT IS SITE SPECIFIC. ANY CHANGES TO THE SYSTEM MUST BE APPROVED BY DHEC. ALTERNATIVE TRENCH PRODUCTS APPROVED UNDER STATE RULES AND REGULATIONS MAY BE SUBSTITUTED. ANY UNAPPROVED CHANGES WILL VOID THIS PERMIT.

Installers must contact the local Environmental Affairs office by 10:00 AM the day before installation to schedule a time for the final inspection. If a Department representative does not arrive within 30 minutes of the schedule time, the installer may complete the final inspection. When a contractor self-inspection occurs, the installer must complete the DHEC form 3978, Approval to Operate Contractor Self-Inspection. The installer must submit the DHEC form 3978 to the Department within 2 business days of completion of the installation.

See Attached Page...

PERMIT TO CONSTRUCT SYSTEM DIAGRAM

(NTS)

See attach design from PSC

Issued/Revised By:

Date:



**PERMIT TO CONSTRUCT AND OPERATE
Onsite Wastewater System**

File Number: 2022080008
County: Berkeley

SPECIAL INSTRUCTIONS/CONDITIONS

THIS PERMIT IS SITE SPECIFIC. ANY CHANGES TO THE SYSTEM MUST BE APPROVED BY DHEC. ALTERNATIVE TRENCH PRODUCTS APPROVED UNDER STATE RULES AND REGULATIONS MAY BE SUBSTITUTED. ANY UNAPPROVED CHANGES WILL VOID THIS PERMIT.


Installers must contact the local Environmental Affairs office by 10:00 AM the day before installation to schedule a time for the final inspection. If a Department representative does not arrive within 30 minutes of the schedule time, the installer may complete the final inspection. When a contractor self-inspection occurs, the installer must complete the DHEC form 3978, Approval to Operate Contractor Self-Inspection. The installer must submit the DHEC form 3978 to the Department within 2 business days of completion of the installation.

- All applicable setbacks set forth in Regulation 61-56 apply.
- Do not install under wet conditions.
- Do not cut, fill, bulldoze, scrape or change the grade of the natural soils in the septic system area.
- Minimum 12" cover over system before approval -5' buffers & 10' tapers from ends & sides of trenches.
- No parking, driving, building or paving over the area of septic system after installation.
- Pre-construction conference required for property owners who wish to install their own system.
- 75' setback from all private wells. 100' setback from public wells.
- ~~Permit issued based on soil work and system recommendations from Tyler Sgro, PSC #119.~~

Issued/Revised By: _____


Date: _____

Phillips - French Santee Road Lot 1

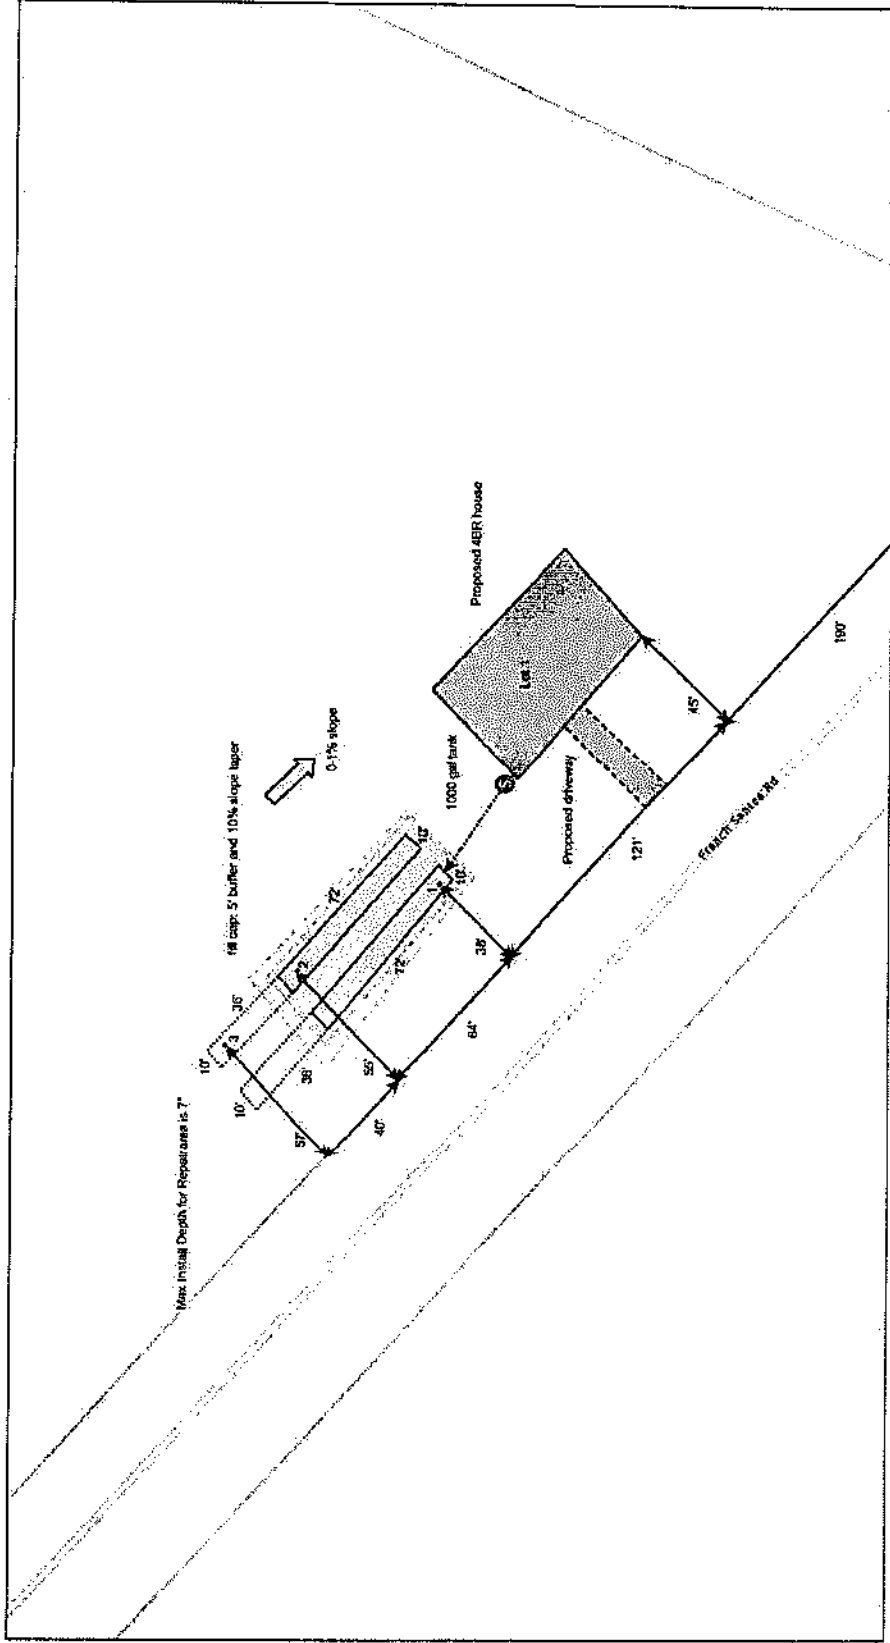

7/29/2022, 7:30:23 PM

- Soil Data Form: Septic_Design_804
- Septic_Design_8153
- Septic Tank
- Distance/Setback
- Distribution Line
- House
- Driveway
- Septic_Design_8782
- Drain Lines
- Repair Lines
- Fill Cap



Env. Community Mgmt. Consultants, S. Open Streets/Maple
Microbilt, Env. HERE, Calvert, Suckalew,
GeoTechnologies, Inc. MET/MAASA, USGS, EPA, NPS,
US Census Bureau, USDA

This map is created by Davis Horizons. Unauthorised use of this map without explicit written permission from Davis Horizons is prohibited.
Created By: Davis Horizons



APPROVAL TO OPERATE

Department Staff Inspection - Onsite Wastewater System

File Nbr: **2022080008**

County: Berkeley

Name: TYLER SGRO

Address:

Program Code: 362

Type Facility: MOBILE HOME

4524 ORR ST

System Code:

Subdivision

NORTH CHARLESTON, SC 29405

TM No. 110-00-02-047

Block:

Lot: 1

Site: FRENCH SANTEE RD LOT 1

Water Supply: PRIVATE

JAMESTOWN, SC

ACTUAL INSTALLATION

(NTS)

FINAL APPROVAL

Installer:

Septic Tank Mfg:

Pump Chbr Mfg:

Pump Mfg:

Pump Model:

Grease Trap Mfg:

Alternative Product:

Aggregate Type:

Aggregate Depth (in):

Trench Width (in):

Trench Depth (in):

Fill Cap:

Fill Cap Depth (in):

Well Installed:

Well Dist (ft):

Building Dist (ft):

Property Dist (ft):

Water Dist (ft):

Tank Size (gal):

Pump Chamber Size (gal):

Elevation Readings:

Plumbing Stubout:

Septic Tank Inlet:

Septic Tank Outlet:

Pump Chamber Inlet:

Line No.

_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____
_____	_____

Comments:

Licensed Installer

Printed Name _____

License No. _____

I hereby certify the system was installed in accordance with the referenced permit and R.61-56 and is in an exposed condition ready for inspection.

Licensed Installer Signature _____

Date _____

Office Use Only

APPROVAL BY DHEC TO OPERATE

THIS CERTIFICATE OF FINAL APPROVAL IN NO WAY GUARANTEES THE LIFE OF THE SYSTEM OR THAT IT WILL FUNCTION PROPERLY UNDER ANY OR ALL CONDITIONS

Approved By: _____

Date: _____

Personal information provided on this form is subject to public scrutiny or release.